

ALFO® Standard Blind Rivet



Aluminium → Stainless Steel A2
Dome Head | open



in accordance with
DIN EN ISO
15977

CAD
DATA
ONLINE

Series
702

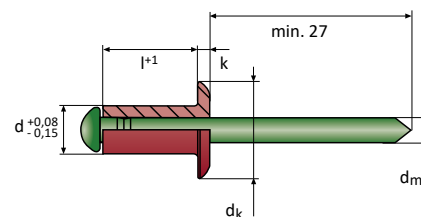

2,4 - 3,2 mm EN AW-5019 [AlMg5]

4,0 - 6,0 mm EN AW-5754 [AlMg3]

d	l +1		Nr.	
2,4	4,0	0,5 - 2,0	10.702.024.040	500
	6,0	1,5 - 4,0	10.702.024.060	500
	8,0	3,5 - 6,0	10.702.024.080	500
dk 5,0 -0,7	dm 1,5	k 0,55 ±0,15	 2,5 mm  420 N	 660 N
3,0	4,0	0,5 - 2,0	10.702.030.040	500
	5,0	1,0 - 3,0	10.702.030.050	500
	6,0	1,5 - 4,0	10.702.030.060	500
	8,0	3,0 - 6,0	10.702.030.080	500
	10,0	5,0 - 7,5	10.702.030.100	500
	12,0	7,0 - 9,0	10.702.030.120	500
dk 6,3 -0,7	dm 1,7	k 0,8 ±0,2	 3,1 mm  740 N	 1000 N
3,2	6,0	1,0 - 3,5	10.702.032.060	500
	8,0	3,0 - 5,5	10.702.032.080	500
	10,0	5,0 - 7,5	10.702.032.100	500
	12,0	7,0 - 9,0	10.702.032.120	500
	16,0	9,0 - 13,0	10.702.032.160	500
	20,0	13,0 - 17,0	10.702.032.200	500
dk 6,5 -0,7	dm 1,9	k 0,8 ±0,2	 3,3 mm  750 N	 1220 N
4,0	5,0	0,5 - 2,5	10.702.040.050	500
	6,0	1,0 - 3,5	10.702.040.060	500
	7,0	3,0 - 4,5	10.702.040.070	500
	8,0	3,0 - 5,5	10.702.040.080	500
	10,0	5,0 - 7,0	10.702.040.100	500
	12,0	6,5 - 9,0	10.702.040.120	500
	16,0	8,5 - 12,5	10.702.040.160	500
	18,0	12,0 - 14,5	10.702.040.180	500
	20,0	12,5 - 16,5	10.702.040.200	500
	25,0	15,5 - 21,0	10.702.040.250	500
dk 8,0 -1,0	dm 2,0	k 1,0 ±0,3	 4,1 mm  1250 N	 1800 N

d	l +1		Nr.		
4,8	6,0	1,0 - 3,0	10.702.048.060	500	
	8,0	2,0 - 5,0	10.702.048.080	500	
	10,0	4,0 - 6,5	10.702.048.100	500	
	12,0	5,5 - 8,0	10.702.048.120	500	
	14,0	7,0 - 10,0	10.702.048.140	500	
	16,0	8,0 - 12,0	10.702.048.160	500	
	20,0	11,5 - 15,5	10.702.048.200	500	
dk 9,5 -1,0	dm 2,7	k 1,1 ±0,3	 4,9 mm	 1640 N	 2200 N
5,0	6,0	1,0 - 3,0	10.702.050.060	500	
	8,0	2,5 - 5,0	10.702.050.080	500	
	10,0	4,0 - 6,5	10.702.050.100	500	
	12,0	6,0 - 8,0	10.702.050.120	500	
	14,0	7,5 - 10,0	10.702.050.140	500	
	16,0	8,0 - 12,0	10.702.050.160	500	
	18,0	11,5 - 13,5	10.702.050.180	500	
	20,0	12,0 - 15,5	10.702.050.200	500	
	25,0	15,0 - 20,5	10.702.050.250	500	
	30,0	20,0 - 25,0	10.702.050.300	500	
	35,0	24,5 - 30,0	10.702.050.350	250	
	40,0	29,5 - 35,0	10.702.050.400	250	
dk 9,5 -0,8	dm 2,7	k 1,1 ±0,3	 5,1 mm	 1820 N	 2400 N
6,0	10,0	3,0 - 5,5	10.702.060.100	500	
	12,0	5,0 - 7,5	10.702.060.120	500	
	16,0	7,0 - 11,0	10.702.060.160	500	
	18,0	10,5 - 13,0	10.702.060.180	500	
dk 12,0 -1,2	dm 3,2	k 1,5 ±0,4	 6,1 mm	 2660 N	 3500 N
6,4	12,0	2,5 - 7,0	10.702.064.120	250	
	16,0	6,0 - 11,0	10.702.064.160	250	
dk 12,7 -0,3	dm 3,6	k 2,3 ±0,2	 6,5 mm	 2880 N	 4600 N