

ALFO® Standard Blind Rivet

Aluminium Steel galvanized

Dome Head | open





MOVIE

DIN EN ISO
15977

CAD
DATA
ONLINE

Series
700

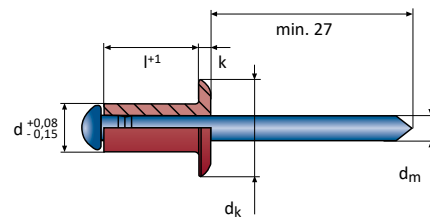

2,0 - 3,2 mm EN AW-5019 [AlMg5]

4,0 - 7,8 mm EN AW-5754 [AlMg3]

d	l +1		Nr.	
2,4	3,0	0,5 - 1,0	10.700.024.030	500
	4,0	0,5 - 2,0	10.700.024.040	500
	6,0	1,5 - 4,0	10.700.024.060	500
	8,0	3,5 - 6,0	10.700.024.080	500
	10,0	6,0 - 8,0	10.700.024.100	500
	12,0	8,0 - 10,0	10.700.024.120	500

dk 5,0 -0,7 dm 1,5 k 0,55 ±0,15 2,5 mm 380 N 600 N

3,0	4,0	0,5 - 2,0	10.700.030.040	500
	5,0	1,0 - 3,0	10.700.030.050	500
	6,0	1,5 - 4,0	10.700.030.060	500
	7,0	3,0 - 5,0	10.700.030.070	500
	8,0	3,0 - 6,0	10.700.030.080	500
	10,0	5,0 - 7,5	10.700.030.100	500
	12,0	7,0 - 9,0	10.700.030.120	500
	16,0	9,0 - 12,5	10.700.030.160	500
	18,0	12,0 - 14,5	10.700.030.180	500
	20,0	13,0 - 16,5	10.700.030.200	500
	25,0	16,0 - 21,5	10.700.030.250	500

dk 6,3 -0,7 dm 1,7 k 0,8 ±0,2 3,1 mm 740 N 1000 N

d	l +1		Nr.	
3,2	4,0	0,5 - 1,5	10.700.032.040	500
	5,0	1,0 - 2,5	10.700.032.050	500
	6,0	1,5 - 3,5	10.700.032.060	500
	8,0	3,0 - 5,5	10.700.032.080	500
	10,0	5,0 - 7,5	10.700.032.100	500
	12,0	7,0 - 9,0	10.700.032.120	500
	14,0	8,5 - 10,5	10.700.032.140	500
	16,0	9,0 - 13,0	10.700.032.160	500
	18,0	10,0 - 14,5	10.700.032.180	500
	20,0	13,0 - 17,0	10.700.032.200	500
	25,0	16,0 - 21,5	10.700.032.250	500

dk 6,5 -0,7 dm 1,9 k 0,8 ±0,2 3,3 mm 750 N 1220 N

4,0	4,0	0,5 - 1,5	10.700.040.040	500
	5,0	1,0 - 2,5	10.700.040.050	500
	6,0	1,0 - 3,5	10.700.040.060	500
	7,0	3,0 - 4,5	10.700.040.070	500
	8,0	3,0 - 5,5	10.700.040.080	500
	10,0	5,0 - 7,0	10.700.040.100	500
	12,0	6,5 - 9,0	10.700.040.120	500
	14,0	8,5 - 11,0	10.700.040.140	500
	16,0	8,5 - 12,5	10.700.040.160	500
	18,0	12,0 - 14,5	10.700.040.180	500
	20,0	12,5 - 16,5	10.700.040.200	500
	25,0	15,5 - 21,0	10.700.040.250	500
	30,0	20,5 - 26,0	10.700.040.300	500
	35,0	25,5 - 31,0	10.700.040.350	500
	40,0	30,5 - 35,0	10.700.040.400	500

dk 8,0 -1,0 dm 2,0 k 1,0 ±0,3 4,1 mm 1250 N 1800 N

d	l +1		Nr.	
4,8	6,0	1,0 - 3,0	10.700.048.060	500
	8,0	2,5 - 5,0	10.700.048.080	500
	9,0	2,5 - 6,0	10.700.048.090	500
	10,0	4,0 - 6,5	10.700.048.100	500
	12,0	6,0 - 8,0	10.700.048.120	500
	14,0	7,5 - 10,0	10.700.048.140	500
	16,0	8,0 - 12,0	10.700.048.160	500
	18,0	11,5 - 13,5	10.700.048.180	500
	20,0	12,0 - 15,5	10.700.048.200	500
	25,0	15,0 - 20,5	10.700.048.250	500
	30,0	20,0 - 25,0	10.700.048.300	500
	35,0	24,5 - 29,5	10.700.048.350	250
	40,0	29,0 - 34,5	10.700.048.400	250
	45,0	34,0 - 39,5	10.700.048.450	250
	50,0	39,0 - 44,5	10.700.048.500	100
	55,0	44,0 - 49,5	10.700.048.550	100
d_k 9,5 -1,0	d_m 2,7	k 1,1 ±0,3	 4,9 mm	 1640 N  2200 N
5,0	6,0	1,0 - 3,0	10.700.050.060	500
	8,0	2,5 - 5,0	10.700.050.080	500
	10,0	4,0 - 6,5	10.700.050.100	500
	12,0	6,0 - 8,0	10.700.050.120	500
	14,0	7,5 - 10,0	10.700.050.140	500
	16,0	8,0 - 12,0	10.700.050.160	500
	18,0	11,5 - 13,5	10.700.050.180	500
	20,0	12,0 - 15,5	10.700.050.200	500
	25,0	15,0 - 20,5	10.700.050.250	500
	30,0	20,0 - 25,0	10.700.050.300	500
	35,0	24,5 - 30,0	10.700.050.350	250
	40,0	29,0 - 35,0	10.700.050.400	250
	45,0	34,5 - 40,0	10.700.050.450	250
	50,0	39,5 - 45,0	10.700.050.500	250
d_k 9,5 -0,8	d_m 2,7	k 1,1 ±0,3	 5,1 mm	 1820 N  2400 N

d	l +1		Nr.	
6,0	8,0	1,0 - 3,5	10.700.060.080	500
	10,0	3,0 - 5,5	10.700.060.100	500
	12,0	5,0 - 7,5	10.700.060.120	500
	16,0	7,0 - 11,0	10.700.060.160	500
	18,0	10,5 - 13,0	10.700.060.180	500
	20,0	11,0 - 15,0	10.700.060.200	500
	22,0	14,5 - 17,0	10.700.060.220	500
	25,0	15,0 - 20,0	10.700.060.250	250
	28,0	19,5 - 22,5	10.700.060.280	250
	30,0	20,0 - 25,0	10.700.060.300	250
	50,0	38,0 - 43,0	10.700.060.500	250
d_k 12,0 -1,2	d_m 3,2	k 1,5 ±0,4	 6,1 mm	 2660 N  3500 N
6,4	12,0	2,5 - 7,0	10.700.064.120	250
	16,0	6,0 - 11,0	10.700.064.160	250
	18,0	10,0 - 13,0	10.700.064.180	250
	20,0	10,0 - 14,5	10.700.064.200	250
	25,0	14,0 - 19,0	10.700.064.250	250
	30,0	18,0 - 24,0	10.700.064.300	250
d_k 13,0 -1,4	d_m 3,6	k 1,8 ±0,4	 6,5 mm	 2880 N  4600 N
7,8	15,0	4,0 - 9,5	10.700.078.150	250
	18,0	9,5 - 12,5	10.700.078.180	250
	22,0	12,5 - 16,5	10.700.078.220	250
	26,0	16,5 - 20,5	10.700.078.260	250
d_k 14,0	d_m 3,7	k 2,0	 8,0 mm	 6600 N  9550 N