

ALFO® Standard Blind Rivet



Aluminium  Steel galvanized
Countersunk Head | open



DIN EN ISO
15978

CAD
DATA
ONLINE

Series
700

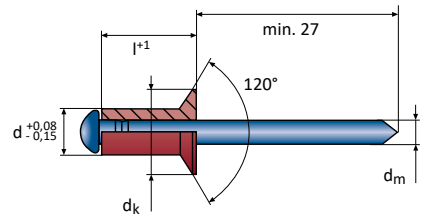

3,0 - 3,2 mm EN AW-5019 [AlMg5]

4,0 - 5,0 mm EN AW-5754 [AlMg3]

d	l ⁺¹		Nr.	
3,0	5,0	1,5 - 3,0	10.700.300.050	500
	6,0	2,0 - 4,0	10.700.300.060	500
	8,0	3,5 - 6,0	10.700.300.080	500
	10,0	5,0 - 7,5	10.700.300.100	500

dk 6,0 -0,4 **dm** 1,7 3,1 mm 740 N 1000 N

3,2	6,0	1,5 - 3,5	10.700.320.060	500
	8,0	3,0 - 5,5	10.700.320.080	500
	10,0	5,0 - 7,5	10.700.320.100	500

dk 6,2 -0,4 **dm** 1,9 3,3 mm 750 N 1220 N

4,0	6,0	1,5 - 3,5	10.700.400.060	500
	8,0	2,0 - 5,5	10.700.400.080	500
	10,0	5,0 - 7,0	10.700.400.100	500
	12,0	6,5 - 9,0	10.700.400.120	500
	16,0	8,5 - 12,5	10.700.400.160	500
	18,0	12,0 - 14,5	10.700.400.180	500
	20,0	12,5 - 16,5	10.700.400.200	500

dk 7,5 -0,5 **dm** 2,0 4,1 mm 1250 N 1580 N

4,8	10,0	4,0 - 6,5	10.700.480.100	500
	12,0	6,0 - 8,0	10.700.480.120	500
	16,0	8,0 - 12,0	10.700.480.160	500
	20,0	12,0 - 15,5	10.700.480.200	500
	25,0	15,0 - 20,5	10.700.480.250	500

dk 9,0 -0,5 **dm** 2,7 4,9 mm 1640 N 2200 N

d	l ⁺¹		Nr.	
5,0	8,0	2,0 - 5,0	10.700.500.080	500
	10,0	4,0 - 6,5	10.700.500.100	500
	12,0	6,0 - 8,0	10.700.500.120	500
	14,0	7,5 - 10,0	10.700.500.140	500
	16,0	8,0 - 12,0	10.700.500.160	500
	20,0	12,0 - 15,5	10.700.500.200	500
	25,0	15,0 - 20,5	10.700.500.250	500
	30,0	20,0 - 25,5	10.700.500.300	500
35,0	25,0 - 30,0	10.700.500.350	250	

dk 9,3 -0,5 **dm** 2,7 5,1 mm 1820 N 2400 N