

ALFO® Standard Blind Rivet



Steel galvanized Steel galvanized

Dome Head | open

DIN EN ISO
15979

CAD
DATA
ONLINE

Series
707

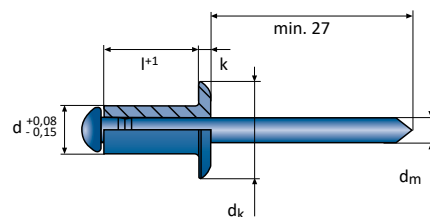

C4C [1.0303]

d	l +1		Nr.	
3,0	5,0	0,5 - 2,5	10.707.030.050	500
	6,0	0,5 - 3,5	10.707.030.060	500
	7,0	2,0 - 4,5	10.707.030.070	500
	8,0	3,0 - 5,5	10.707.030.080	500
	10,0	5,0 - 7,0	10.707.030.100	500
	12,0	6,5 - 9,0	10.707.030.120	500

dk 6,3 -0,7 dm 1,9 k 0,8 ±0,2 3,1 mm 1000 N 1340 N

3,2	5,0	0,5 - 2,5	10.707.032.050	500
	6,0	0,5 - 3,5	10.707.032.060	500
	8,0	3,0 - 5,5	10.707.032.080	500
	10,0	5,0 - 7,0	10.707.032.100	500
	12,0	6,5 - 9,0	10.707.032.120	500
	14,0	8,5 - 11,0	10.707.032.140	500

dk 6,5 -0,7 dm 2,0 k 0,8 ±0,2 3,3 mm 1180 N 1560 N

4,0	6,0	0,5 - 3,5	10.707.040.060	500
	7,0	2,0 - 4,5	10.707.040.070	500
	8,0	3,0 - 5,5	10.707.040.080	500
	9,0	4,0 - 6,5	10.707.040.090	500
	10,0	5,0 - 7,0	10.707.040.100	500
	12,0	6,0 - 9,0	10.707.040.120	500
	14,0	8,0 - 11,0	10.707.040.140	500
	16,0	9,0 - 12,5	10.707.040.160	500
	18,0	12,0 - 14,5	10.707.040.180	500
	20,0	12,0 - 16,5	10.707.040.200	500

dk 8,0 -1,0 dm 2,3 k 1,0 ±0,3 4,1 mm 2100 N 2800 N

4,8	6,0	1,0 - 2,5	10.707.048.060	500
	7,0	1,0 - 3,5	10.707.048.070	500
	8,0	2,5 - 4,5	10.707.048.080	500
	9,0	3,0 - 5,5	10.707.048.090	500
	10,0	4,0 - 6,5	10.707.048.100	500
	12,0	6,0 - 8,5	10.707.048.120	500
	14,0	7,0 - 10,0	10.707.048.140	500
	16,0	8,0 - 12,0	10.707.048.160	500
	18,0	9,0 - 13,5	10.707.048.180	500
	20,0	11,0 - 15,5	10.707.048.200	500
	22,0	13,0 - 17,0	10.707.048.220	500
	25,0	15,0 - 20,0	10.707.048.250	500
	30,0	19,5 - 24,5	10.707.048.300	500

dk 9,5 -1,0 dm 2,7 k 1,1 ±0,3 4,9 mm 3180 N 4220 N

5,0	8,0	2,5 - 4,5	10.707.050.080	500
	10,0	4,0 - 6,5	10.707.050.100	500
	12,0	6,0 - 8,5	10.707.050.120	500
	14,0	7,0 - 10,5	10.707.050.140	500
	16,0	8,0 - 12,0	10.707.050.160	500
	18,0	10,0 - 13,5	10.707.050.180	500
	20,0	11,0 - 15,0	10.707.050.200	500
	25,0	14,5 - 20,0	10.707.050.250	250
	30,0	19,5 - 25,0	10.707.050.300	250
	35,0	24,5 - 29,5	10.707.050.350	250
	40,0	29,0 - 34,0	10.707.050.400	250

dk 9,5 -0,8 dm 2,9 k 1,1 ±0,3 5,1 mm 3320 N 4740 N

6,0	10,0	2,0 - 5,5	10.707.060.100	250
	12,0	4,0 - 7,5	10.707.060.120	250
	16,0	7,0 - 11,5	10.707.060.160	250
	20,0	11,0 - 15,0	10.707.060.200	250
	25,0	14,5 - 20,0	10.707.060.250	250

dk 12,0 -1,2 dm 3,6 k 1,5 ±0,4 6,1 mm 4340 N 6000 N

6,4	8,0	1,0 - 4,0	10.707.064.080	250
	10,0	3,0 - 6,0	10.707.064.100	250
	12,0	3,5 - 7,5	10.707.064.120	250
	16,0	6,0 - 11,5	10.707.064.160	250
	18,0	8,0 - 13,0	10.707.064.180	250
	20,0	9,0 - 14,5	10.707.064.200	250
	25,0	13,0 - 19,5	10.707.064.250	250
	30,0	19,0 - 24,5	10.707.064.300	250

dk 13,0 -1,4 dm 3,8 k 1,8 ±0,4 6,5 mm 4920 N 7000 N

8,0	14,0	3,0 - 8,5	10.707.080.140	250
	16,0	5,0 - 10,5	10.707.080.160	250
	18,0	8,0 - 12,0	10.707.080.180	100
	20,0	11,5 - 14,0	10.707.080.200	100

dk 20,0 -0,7 dm 4,0 k 2,5 +0,5 8,1 mm 9400 N 13000 N

Diameter 8,0 mm not standardized.